

data sheet

ARGCO



TOP BEAM CLAMP


Function: Designed for attaching hanger rod to the top flange of a beam or bar joist, where the flange thickness does not exceed 3/4 inch (19.05mm). The open U design permits rod adjustment.

Approvals: Underwriters' Laboratories Listed in the U.S.(UL), Canada (CUL) and Factory Mutual Approved. Complies with Federal Specifications A-A-1192A (Type19) and Manufacturers' Standardization Society ANSI/SP-69 and ANSI/SP-58 (Type19).

Material: Low Carbon Steel with hardened steel cup point set screw

Finish: Electro-galvanized

Ordering: Specify figure number.

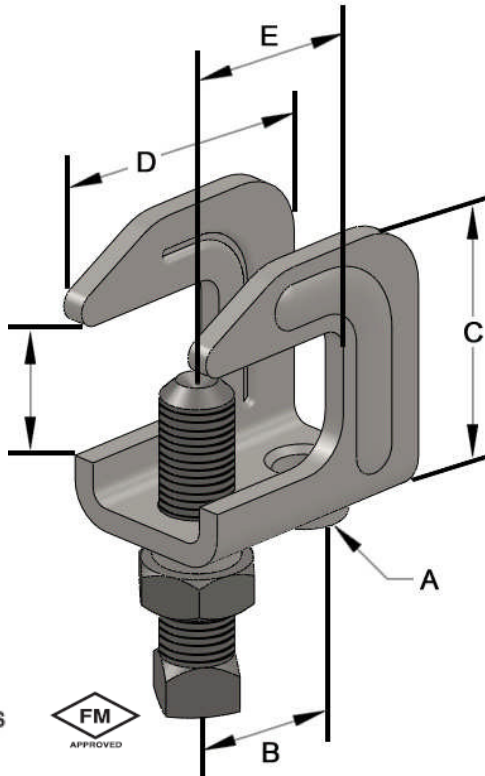

Set Screw Torque			Caution should be taken not to over tighten the set screw
Nominal Thread Size		3/8	
Rec. Torque	in-lbs	60	
	N-m	(6.8)	

Rod Size A	B	C	D	E	Max. Pipe Size	Max. Rec. Load		Wt. Each
						lbs.	kN	
3/8	3/4 (19.05)	1-9/16 (39.69)	1-1/2 (38.10)	9/16 (14.29)	4 (100)	610	(2.71)	.20 (.09)

***Note:** When a torque wrench is unavailable, the set screw should be tightened so it contacts the I-beam and then an additional 1/4 to 1/2 turn added.*

The information contained herein is produced in good faith and is believed to be reliable but is for guidance only. ARGCO and its agents cannot assume liability or responsibility for results obtained in the use of its product by persons whose methods are outside or beyond our control. It is the user's responsibility to determine the suitability of any of the products, methods of use, or preparation prior to use, mentioned in our literature. It is the user's responsibility to observe and adapt such precautions as may be advisable for the protection of personnel and property in the handling and use of any of our products.

**FOR MORE INFORMATION CALL ARGCO AT 1-800-854-1015
OR LOG ONTO WWW.ARGCO.COM**