



ARGCO

PIPE FABRICATION PIPE NIPPLES CATALOG



THREAD x THREAD PIPE NIPPLES



Seamless Black and Hot-Dipped Galvanized
ANSI/ASME B1.20.1



[CLICK HERE FOR BLACK STEEL](#)
[CLICK HERE FOR GALVANIZED STEEL](#)

[CLICK HERE FOR TECHNICAL DATA](#)

EXTENDED NIPPLES up to 60" Long

THREAD x GROOVE NIPPLES



Seamless Black and Hot-Dipped Galvanized
Schedule 40 Steel
ASTM A53
Groove cut conforms to AWWA C606



[CLICK HERE FOR BLACK STEEL](#)
[CLICK HERE FOR GALVANIZED STEEL](#)

[CLICK HERE FOR TECHNICAL DATA](#)

GROOVE x GROOVE NIPPLES



Seamless Black and Hot-Dipped Galvanized
Schedule 40 Steel
ASTM A53
Groove cut conforms to AWWA C606

[CLICK HERE FOR BLACK STEEL](#)
[CLICK HERE FOR GALVANIZED STEEL](#)

[CLICK HERE FOR TECHNICAL DATA](#)



BEVEL x GROOVE PIPE NIPPLES



Seamless Black and Hot-Dipped Galvanized
Schedule 40 Steel
ASTM A53
Groove cut conforms to AWWA C606



[CLICK HERE FOR BLACK STEEL](#)
[CLICK HERE FOR GALVANIZED STEEL](#)

[CLICK HERE FOR TECHNICAL DATA](#)

SQUARE CUT x GROOVE PIPE NIPPLES



Seamless Black and Hot-Dipped Galvanized
Schedule 40 Steel
ASTM A53
Groove cut conforms to AWWA C606

[CLICK HERE FOR BLACK STEEL](#)
[CLICK HERE FOR GALVANIZED STEEL](#)

[CLICK HERE FOR TECHNICAL DATA](#)

FLANGE x GROOVE ADAPTER NIPPLES



Allows for direct connection of a grooved system to ANSI class 12/150 flanged components.

[CLICK HERE TO PURCHASE](#)
[CLICK HERE FOR GALVANIZED](#)
[CLICK HERE FOR TECHNICAL DATA](#)



WELDED OUTLETS


GROOVE x WELD



Type 40 Standard Weight Cut Groove Outlet Carbon Steel Branch Outlet for Fire Protection and other low pressure piping systems

UL, ULC, FM working pressure up to 500 psi.

MADE IN USA



GROOVE x THREAD



[CLICK HERE TO PURCHASE GROOVE x WELD](#)
[CLICK HERE FOR TECHNICAL DATA](#)

[CLICK HERE TO PURCHASE GROOVE x THREAD](#)
[CLICK HERE FOR TECHNICAL DATA](#)



ARGCO

PH: 800.854.1015 • ARGCO.com • REV. 8/25/2025

PIPE FLANGE GASKETS


RED RUBBER RING GASKETS



Specifications:
Color: Red-Brown
Finish: Smooth
Tensile: 400 psi
ASTM D1330 - Grade 11, Also D2000 M2AA703-A13 B13-EA14

[CLICK HERE TO PURCHASE](#)
[CLICK HERE FOR TECHNICAL DATA](#)

RED RUBBER FULL FACE GASKETS



Specifications:
Color: Red-Brown
Finish: Smooth
Tensile: 400 psi
ASTM D1330 - Grade 11, Also D2000 M2AA703-A13 B13-EA14

[CLICK HERE TO PURCHASE](#)
[CLICK HERE FOR TECHNICAL DATA](#)

NON-ASBESTOS RING GASKETS



Properties:	
Fiber System	Aramid/Inorganic
Binder	NBR
Min Temp	-40° F
Max Temp	750° F
Max Pressure	1300 PSI

[CLICK HERE TO PURCHASE](#)
[CLICK HERE FOR TECHNICAL DATA](#)

NON-ASBESTOS FULL FACE GASKETS



Properties:	
Fiber System	Aramid/Inorganic
Binder	NBR
Min Temp	-40° F
Max Temp	750° F
Max Pressure	1300 PSI

[CLICK HERE TO PURCHASE](#)
[CLICK HERE FOR TECHNICAL DATA](#)



PIPE FLANGE GASKET & BOLT SETS



RED RUBBER RING GASKET BOLT BOLT PACKS



Specifications:

Color: Red-Brown

Finish: Smooth

Tensile: 400 psi

ASTM D1330 - Grade 11, Also D2000 M2AA703-A13 B13-EA14

[CLICK HERE TO PURCHASE](#)

[CLICK HERE FOR TECHNICAL DATA](#)

RED RUBBER FULL FACE GASKET BOLT PACKS



Specifications:

Color: Red-Brown

Finish: Smooth

Tensile: 400 psi

ASTM D1330 - Grade 11, Also D2000 M2AA703-A13 B13-EA14

[CLICK HERE TO PURCHASE](#)

[CLICK HERE FOR TECHNICAL DATA](#)

NON-ASBESTOS RING GASKET BOLT PACKS



Properties:

Fiber System

Aramid/Inorganic

Binder

NBR

Min Temp

-40° F

Max Temp

750° F

Max Pressure

1300 PSI

[CLICK HERE TO PURCHASE](#)

[CLICK HERE FOR TECHNICAL DATA](#)

NON-ASBESTOS FULL FACE GASKET BOLT PACKS



Properties:

Fiber System

Aramid/Inorganic

Binder

NBR

Min Temp

-40° F

Max Temp

750° F

Max Pressure

1300 PSI

[CLICK HERE TO PURCHASE](#)


[CLICK HERE FOR TECHNICAL DATA](#)




ARGCO

PH: 800.854.1015 • ARGCO.com

REV. 8/25/2025

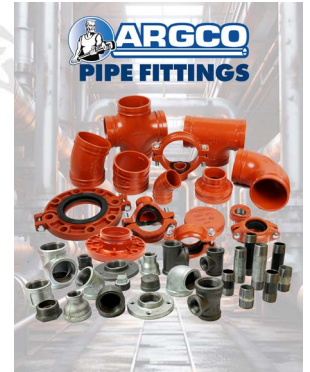

**Click to Link to ARGCO's
Interactive Catalogs**

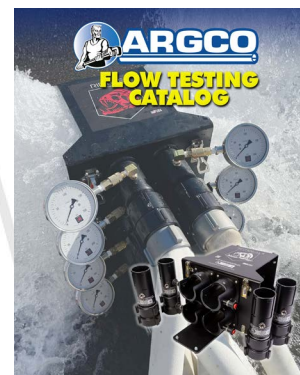

ARGCO.com

ARGCO SALES: toll free: 800-854-1015 | international: 760-727-1644 | fax: 800-924-5922 | email: sales@argco.com