

FORGED BRASS BALL VALVES - FULL PORT

600# • C x C



- Quality forged brass construction eliminates porosity
- Suitable for Water, Oil, a wide range of Gases
- Max working pressure rated 600# WOG, 150 WSP & 175 PSIG & 1/2G 2G 5G
- Maximum temperature is 400° @ 100 psi
- PTFE seats and seals
- 150 WSP




UL File No: MH27906



CSA File No: ISO 9001
2041220000

MATERIALS

PART	MATERIAL
BODY	BRASS
SEALING WASHER	PTFE
CHROME PLATED BALL	BRASS
GLAND WASHER	PTFE
BALL PACKING	PTFE
HANDLE NUT	STAINLESS STEEL
STEM	BRASS
PACKING NUT	BRASS
CAP	BRASS
ZINC PLATE HANDLE	CARBON STEEL

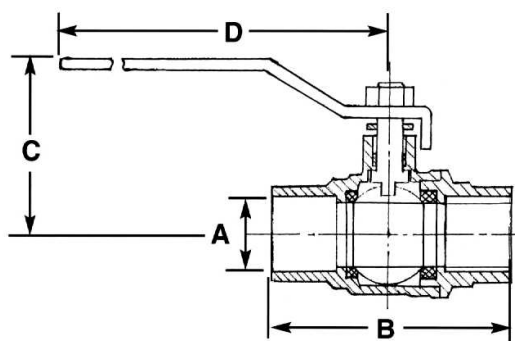

DIMENSIONS

PART #	SIZE	A	B	C	D
65-20-412UL	1/2"	0.59"	2.28"	1.97"	3.54"
65-20-413UL	3/4"	0.75"	2.83"	2.20"	4.06"
65-20-414UL	1"	0.94"	3.54"	2.56"	4.84"
65-20-415UL	1-1/4"	1.26"	4.06"	2.76"	4.84"
65-20-416UL	1-1/2"	1.50"	4.45"	3.35"	6.02"
65-20-417UL	2"	1.89"	5.24"	3.74"	6.02"

System No.		Location		Spec Section		Paragraph	
Submitted By		Date		Approved		Date	